

宁波威仕消防设备有限公司 POWER SAINTS LTD

Since 2004

CATALOG

WWW.SAINTSEA.COM





**GLOBAL
SUPPLIER
AND
GLOBAL
PROVIDER**

SINCE 2004



POWER SAINTS

High-end Fire-fighting Solutions Provider





Power Saints Ltd. was founded in 2004 in Yuayo City of Zhejiang Province, in the eastern part of the Yangtze River Delta Economic Zone. We focus on the design, production, sales and service of fire extinguishers, hose reels, fire suppression systems and spare parts for fire fighting industry.

Power Saints comply with ISO 9001 quality system, and our products have obtained DOT, UL, CCC, CE, EN3, NF, MED, LPCB, BSI, UKCA international & national approvals. Our high quality products have been recognized by global customers with our sales network in more than 50 countries all over the world.

We have registered brands of FIREBABY, KRONE, KNOWAY etc. Being more environmental friendly, more cost saving, and easy to maintain, recycle and degrade, is what we are endeavoring to achieve for our products.




Our Slogan: To protect billions of people's safety and happiness.
Our Target: Sustainable operation, continuous innovation, step abroad with China origin to enhance our value for the future.

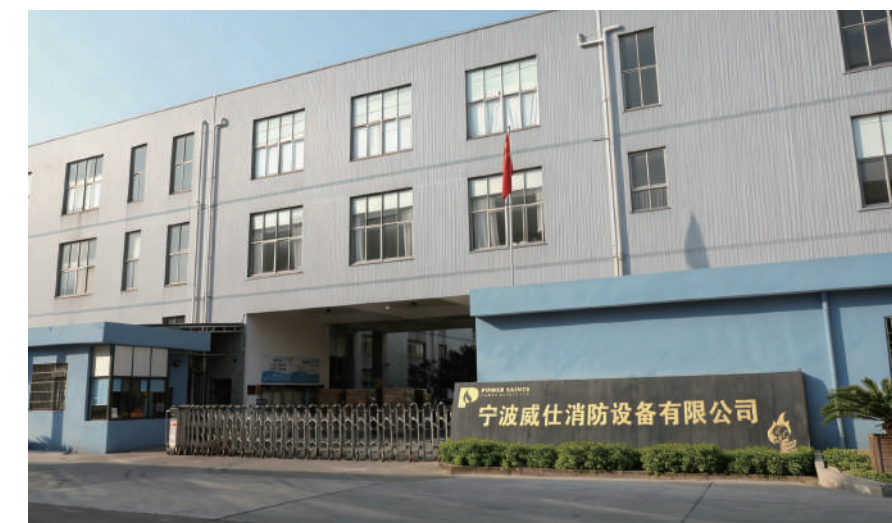


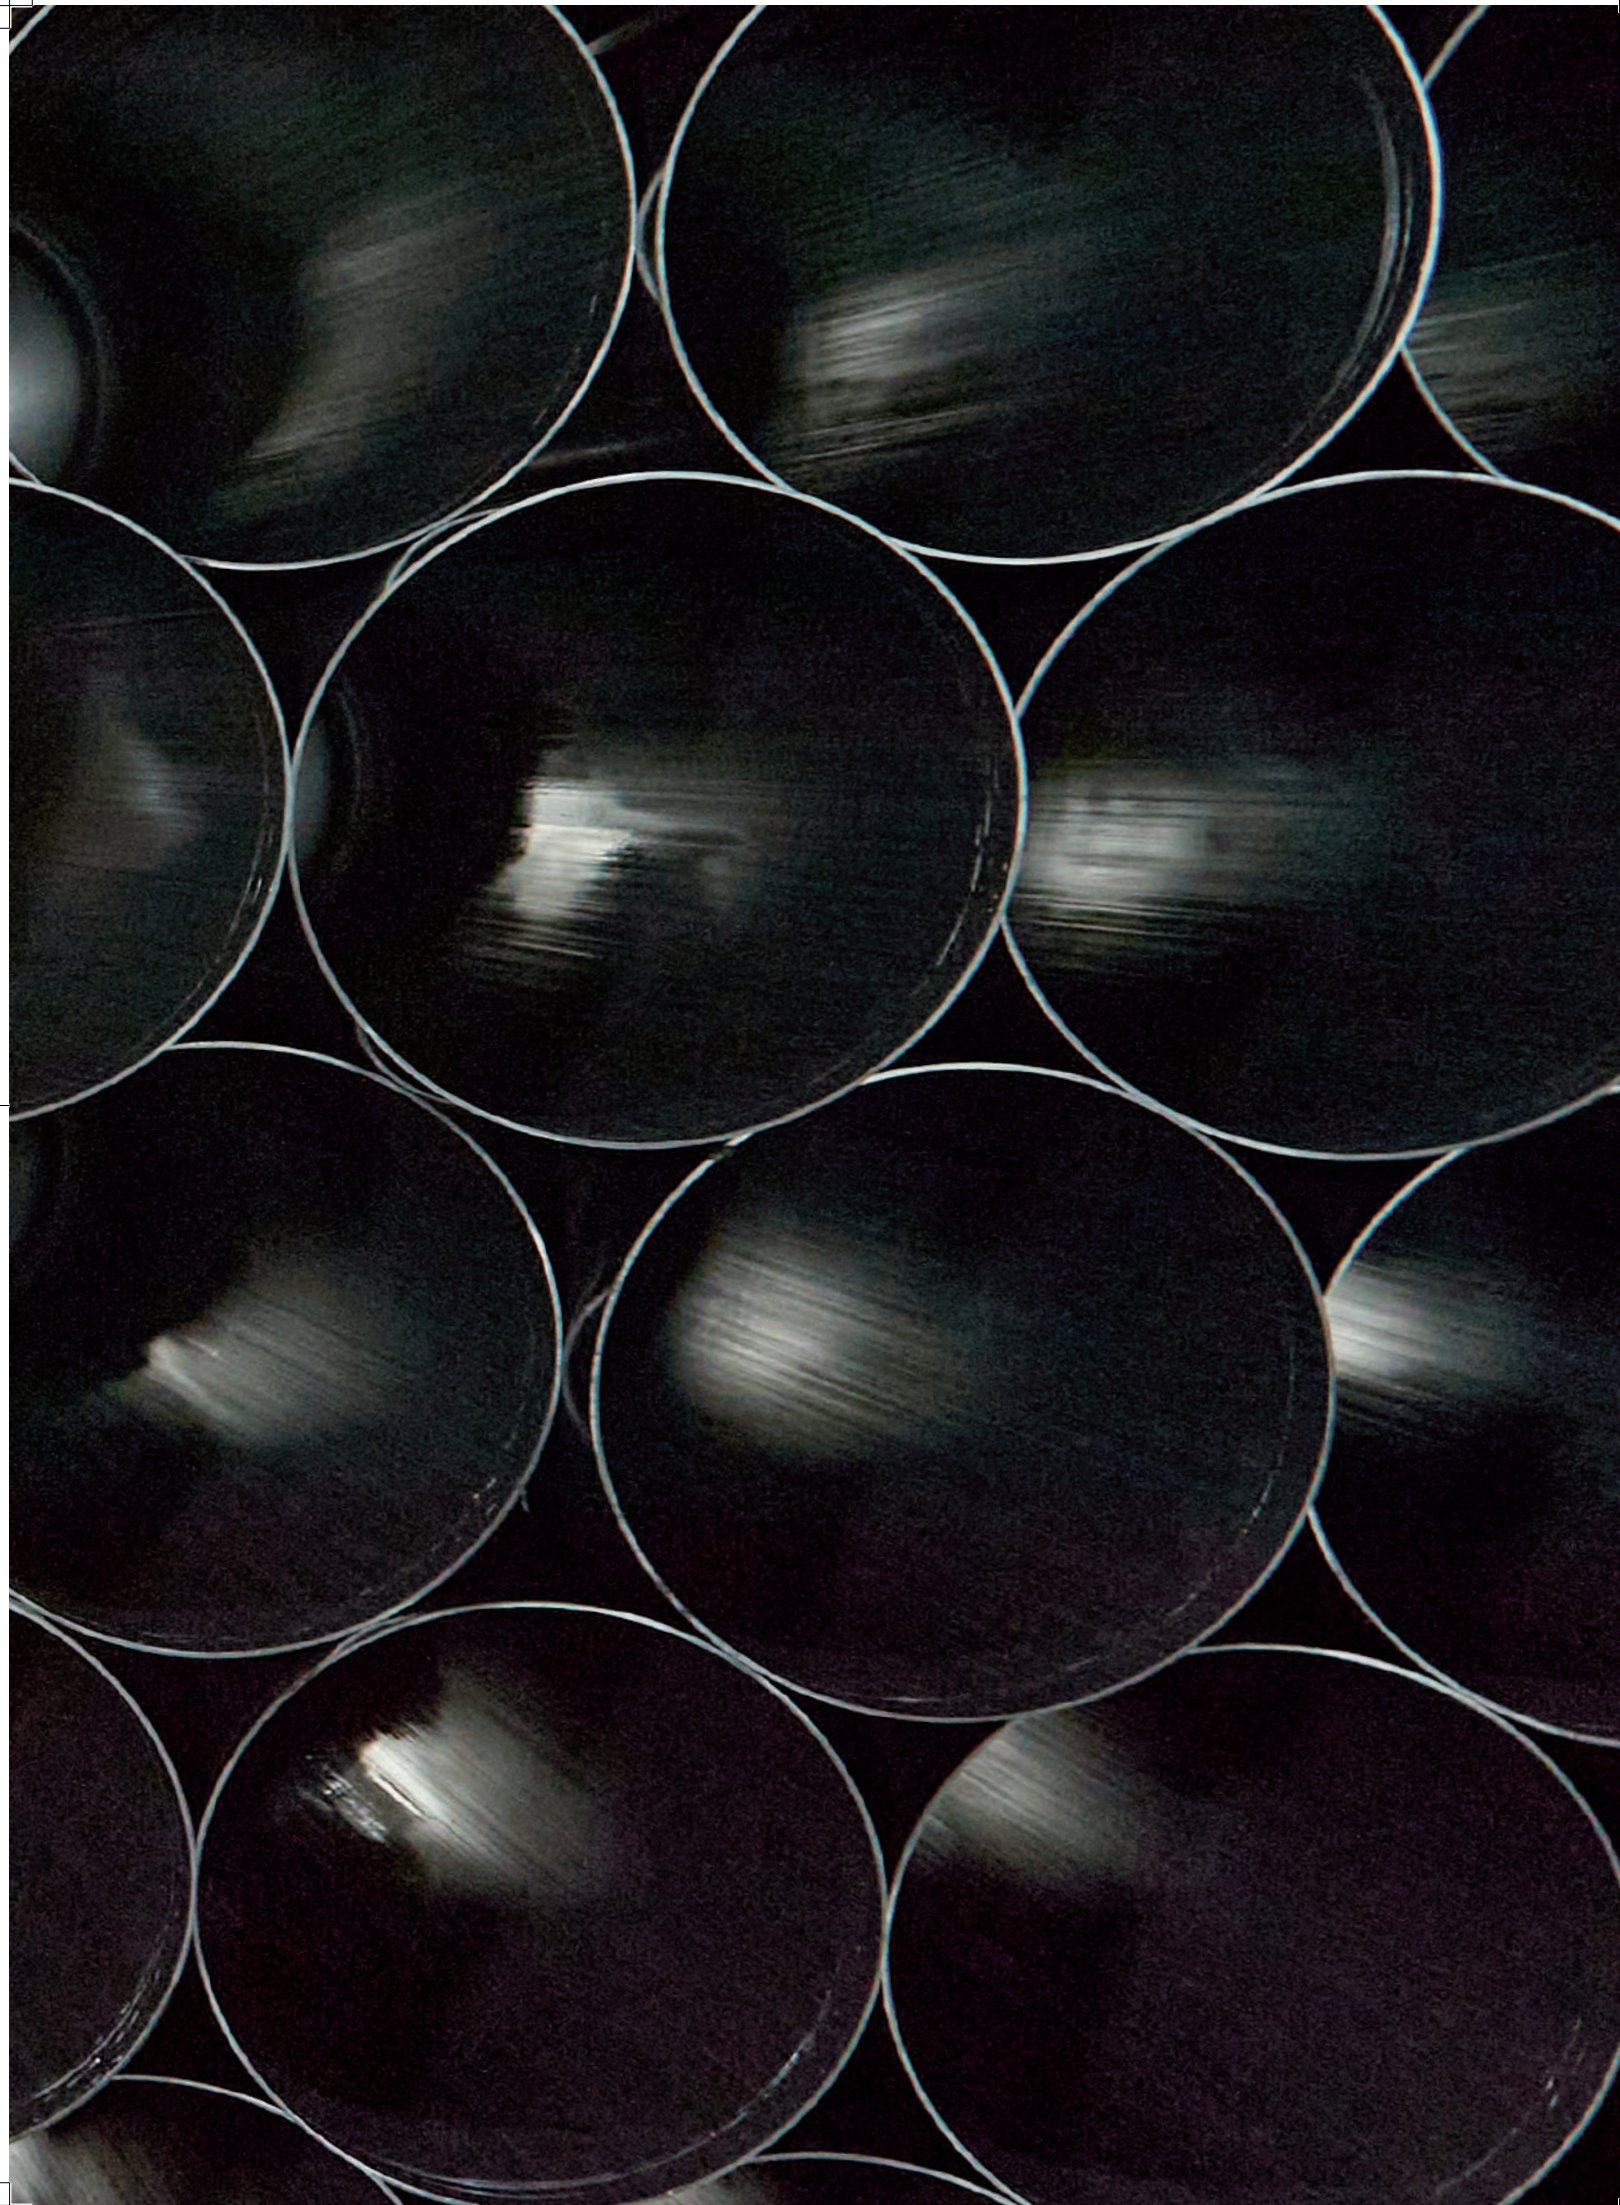

contents

Fire Extinguishers	————	03
Cylinders	————	30
Cartridges	————	35
Hose Reels	————	38
Cabinets	————	42

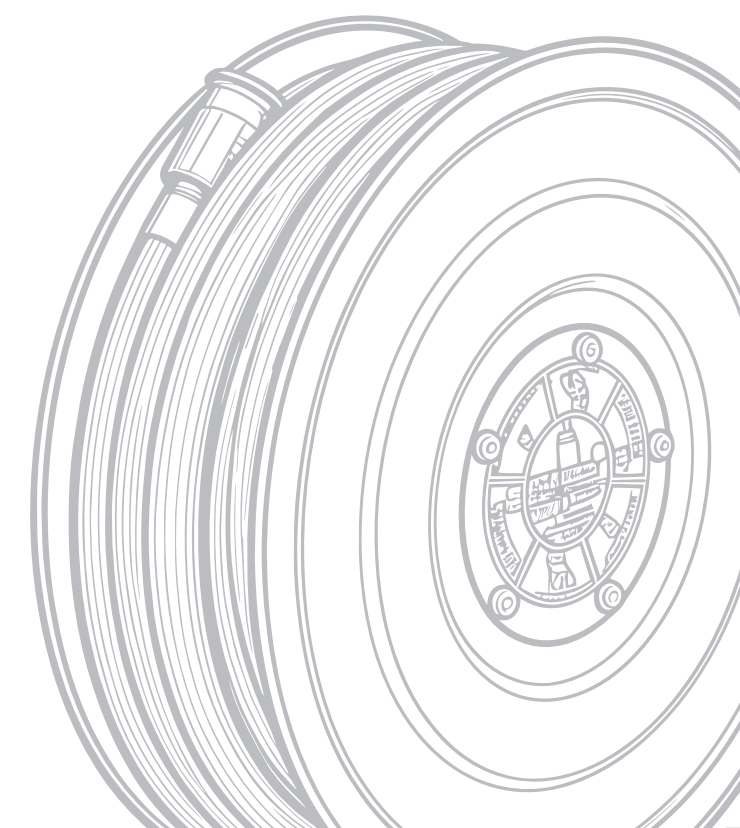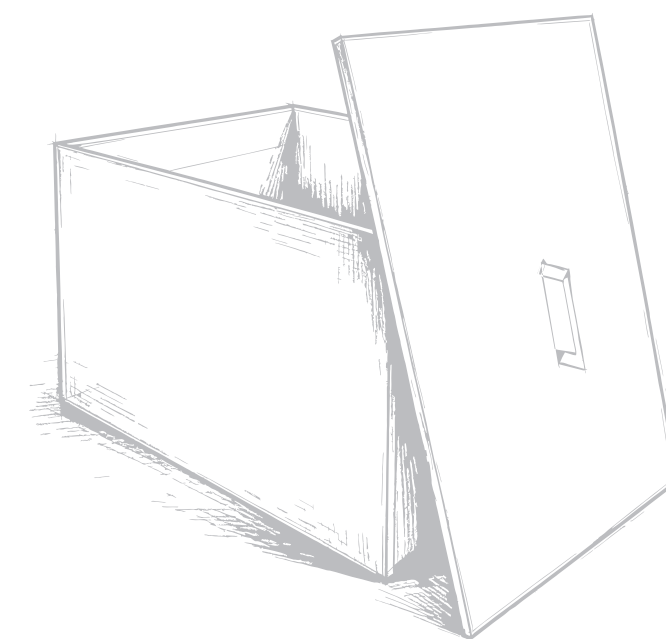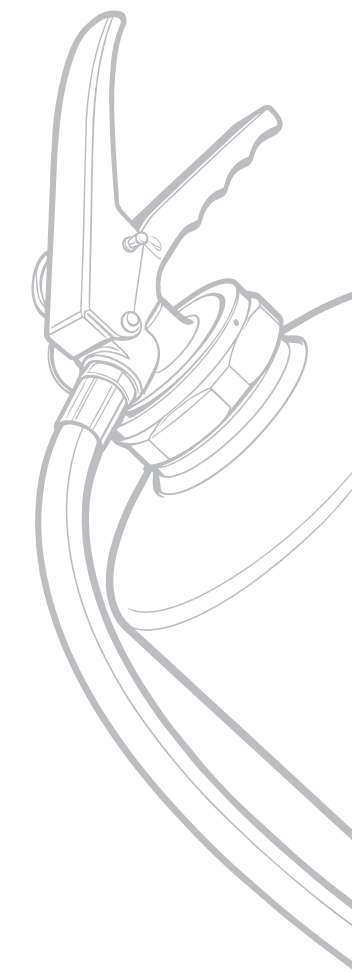

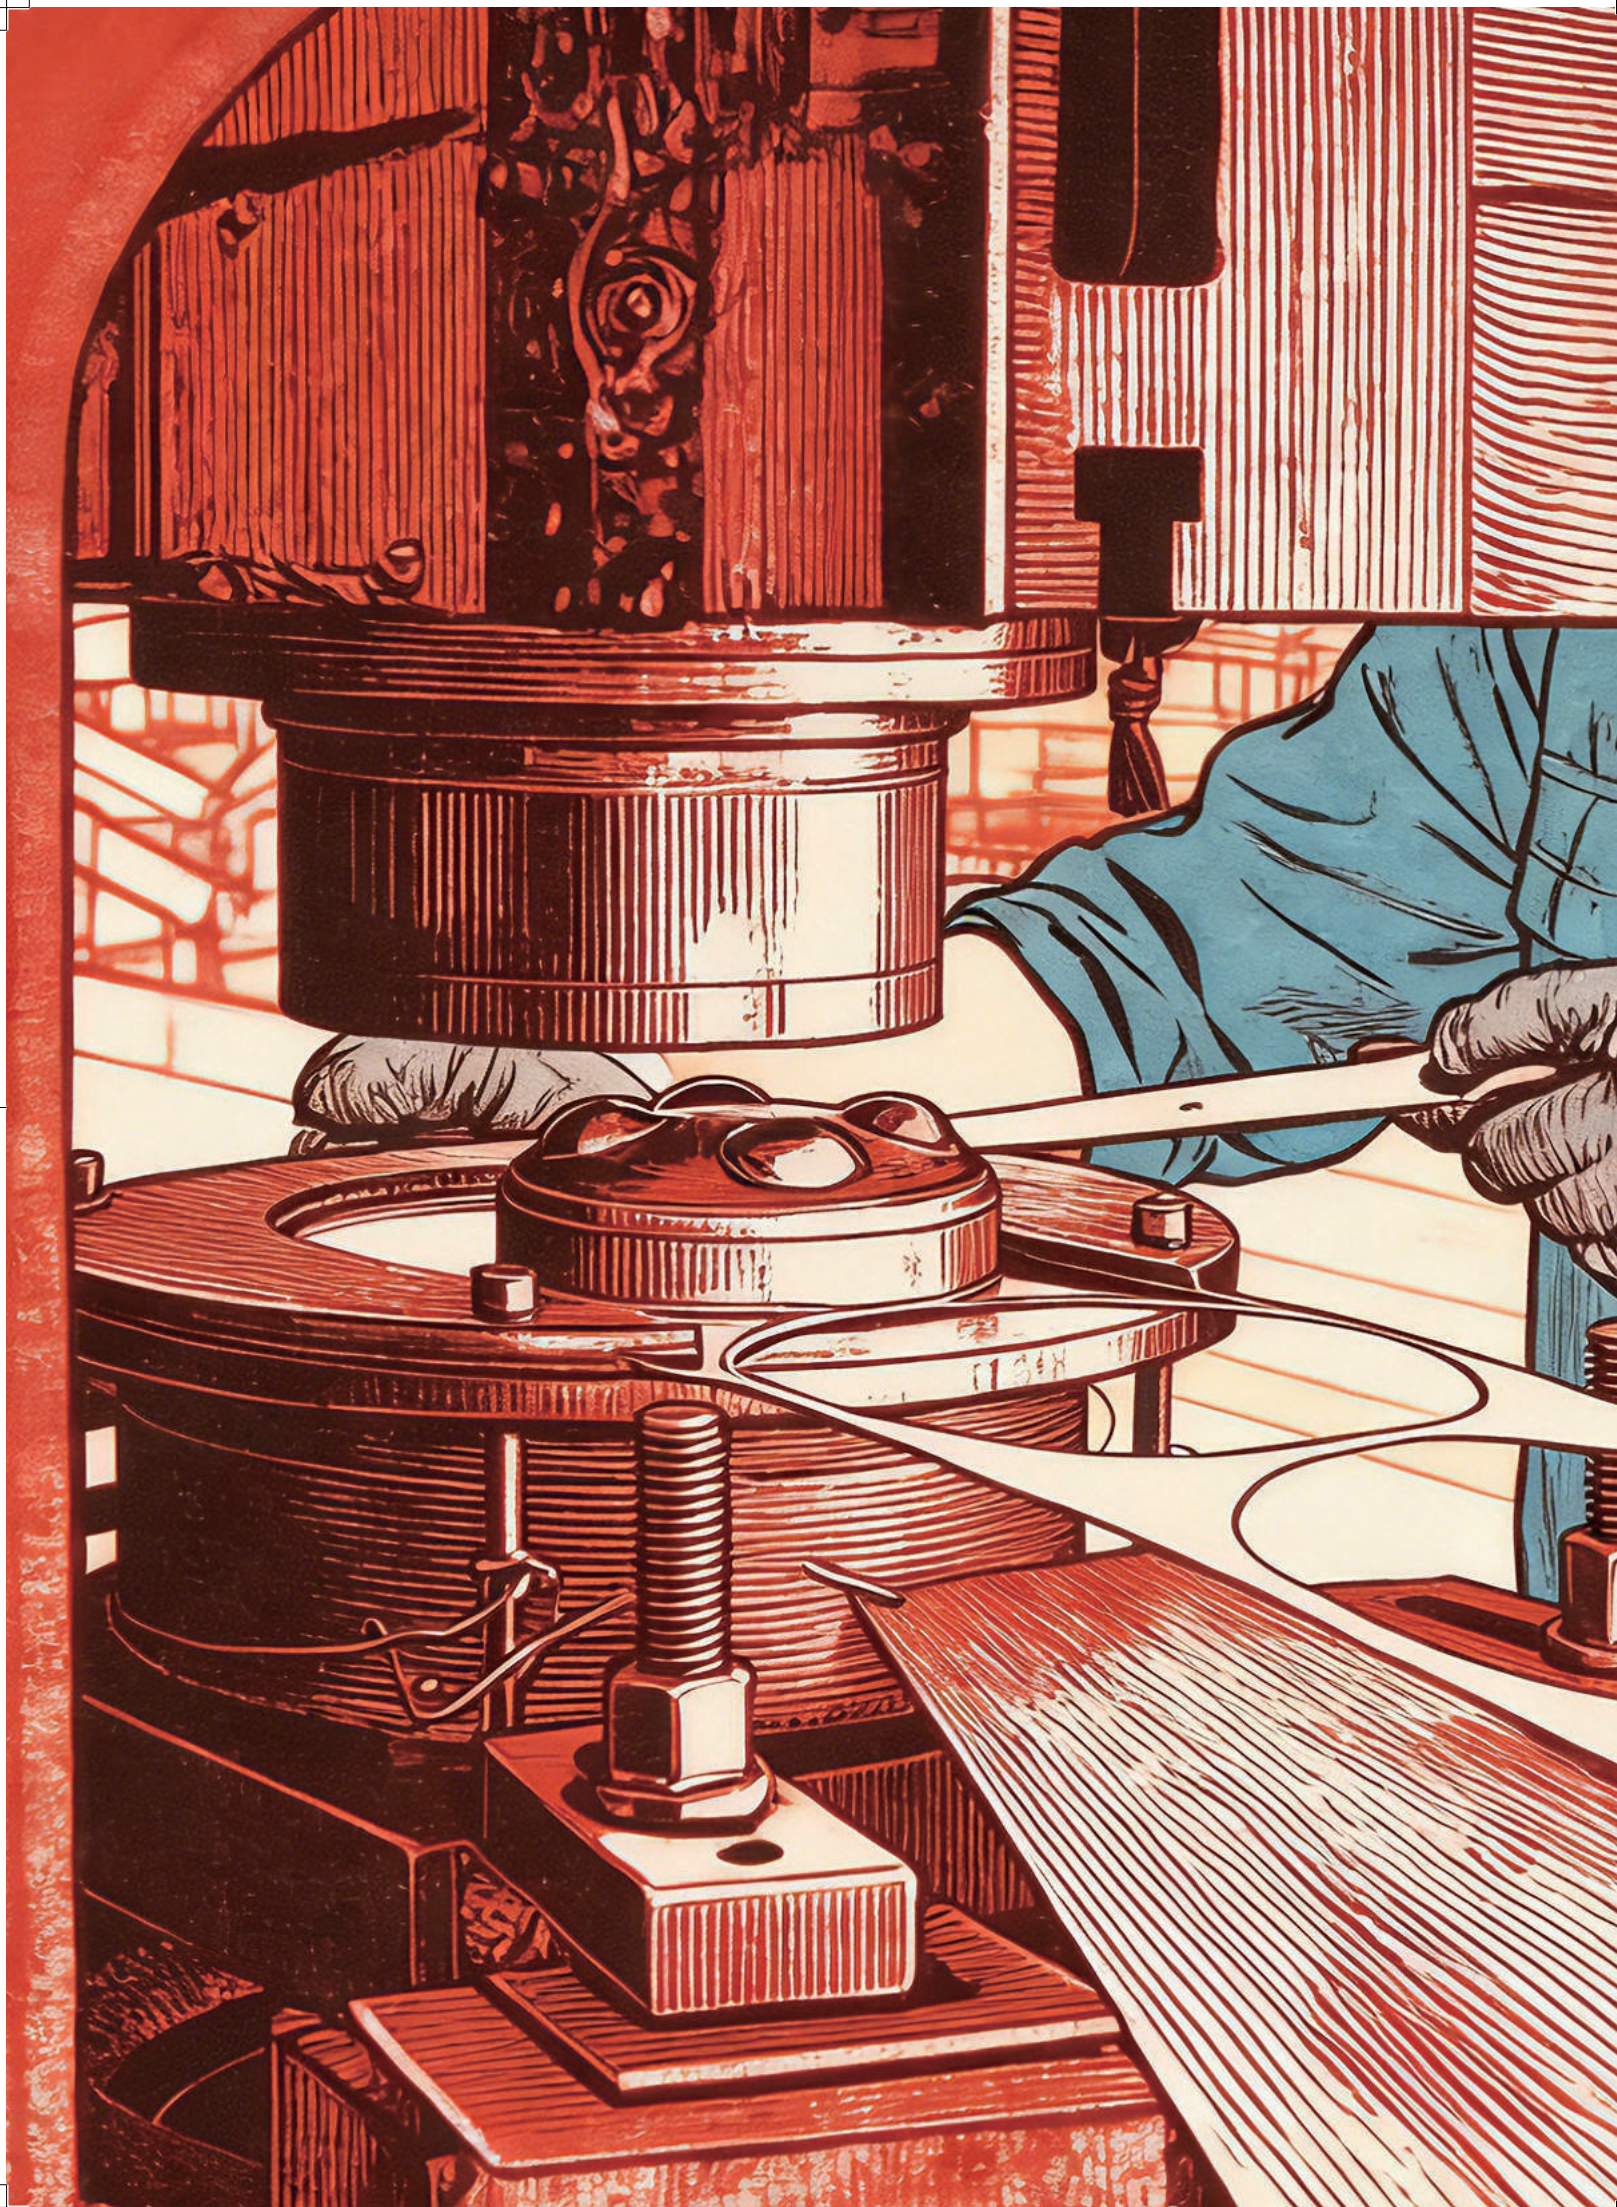

FIRE EXTINGUI —SHERS AND MAIN PARTS





PSMPZ2B/1



EN3 Approval Number	SP 249 / 15
Fire Rating	13A89BC
Size of Cylinder (mm)	Φ110X302
Working Pressure (bar)	15
Weight (kg)	3.7
Temperature Range (°C)	-30~+60
Packing Size (mm)	120x120x405



PSMPZ3



EN3 Approval Number	SP 175 / 10
Fire Rating	13A89BC
Size of Cylinder (mm)	Φ130X340
Working Pressure (bar)	15
Weight (kg)	5.2
Temperature Range (°C)	-30~+60
Packing Size (mm)	145x145x425



PSMPZ4J



Fire Rating	34A183BC
Size of Cylinder (mm)	Φ140X340
Working Pressure (bar)	15
Weight (kg)	6.2
Temperature Range (°C)	-30~+60
Packing Size (mm)	150x150x430





PSMPZ6A/5



EN3 Approval Number	SP250/15
Fire Rating	43A233BC
Size of Cylinder (mm)	Φ160X450
Working Pressure (bar)	15
Weight (kg)	9.5
Temperature Range (°C)	-30~+60
Packing Size (mm)	170x170x565



PSMPZ6A/6



EN3 Approval Number	SP251/15
Fire Rating	55A233BC
Size of Cylinder (mm)	Φ160X450
Working Pressure (bar)	15
Weight (kg)	9.5
Temperature Range (°C)	-30~+60
Packing Size (mm)	170x170x565



PSMFZ2/2



EN3 Approval Number	SP254/15
Fire Rating	13A70B25F
Size of Cylinder (mm)	Φ110X310
Working Pressure (bar)	10
Weight (kg)	3.9
Temperature Range (°C)	0~+60
Packing Size (mm)	120x120x405



PSMFZ3



EN3 Approval Number	SP13/08
Fire Rating	13A55B
Size of Cylinder (mm)	Φ130X340
Working Pressure (bar)	10
Weight (kg)	5.6
Temperature Range (°C)	-5~+60
Packing Size (mm)	145x145x440



PSMFZ2/3 PSMFZ2/4



EN3 Approval Number	SP43/24 / Coming soon
Fire Rating	13A/5A34B5F
Size of Cylinder (mm)	Φ110X310
Working Pressure (bar)	10
Weight (kg)	3.9
Temperature Range (°C)	+5~+60
Packing Size (mm)	120x120x405



PSMPZ9/1



EN3 Approval Number	SP252/15
Fire Rating	55A233BC
Size of Cylinder (mm)	Φ180X485
Working Pressure (bar)	15
Weight (kg)	14
Temperature Range (°C)	-30~+60
Packing Size (mm)	190x190x600



PSMPZ12/1



EN3 Approval Number	SP253/15
Fire Rating	55A233BC
Size of Cylinder (mm)	Φ180X600
Working Pressure (bar)	15
Weight (kg)	17.5
Temperature Range (°C)	-30~+60
Packing Size (mm)	190x190x720



PSMFZ6/6



EN3 Approval Number	Soon
Fire Rating	27A144B
Size of Cylinder (mm)	Φ160X450
Working Pressure (bar)	10
Weight (kg)	9.8
Temperature Range (°C)	+5~+60
Packing Size (mm)	170x170x565



PSMFZ6/2



EN3 Approval Number	SP255/15
Fire Rating	34A183B40F
Size of Cylinder (mm)	Φ160X450
Working Pressure (bar)	10
Weight (kg)	9.8
Temperature Range (°C)	0~+60
Packing Size (mm)	170x170x565



PSMFZ9/2



EN3 Approval Number	SP256/15
Fire Rating	43A233B40F
Size of Cylinder (mm)	Φ180X500
Working Pressure (bar)	10
Weight (kg)	13.1
Temperature Range (°C)	0~+60
Packing Size (mm)	190x190x605



Fluorine Free

PSMWZ9 **HOT!**

EN3 CE DNV 9L WATER

EN3 Approval Number	SP16/08
Fire Rating	21A
Size of Cylinder (mm)	Φ180X525
Working Pressure (bar)	10
Weight (kg)	14
Temperature Range (°C)	5~+60
Packing Size (mm)	190x190x635



PSMCZ2

EN3 CE BSI CO2 2KG CO2

EN3 Approval Number	SP02/08
Fire Rating	34B
Size of Cylinder (mm)	Φ116X364
Material	34CrMo4
Working Pressure (bar)	216
Weight (kg)	6.3
Temperature Range (°C)	-30~+60
Packing Size (mm)	170x130x475



PSMPG6

EN3 CE BSI 6KG POWDER ABC

EN3 Approval Number	SP19/13
Fire Rating	34A183BC
Size of Cylinder (mm)	Φ150X470
Cartridge	120g CO2
Weight (kg)	10.5
Temperature Range (°C)	-30~+60
Packing Size (mm)	210x160x565



PSMFG6/1 **HOT!**

EN3 CE BSI 6L FOAM

EN3 Approval Number	SP257/15
Fire Rating	34A183B40F
Size of Cylinder (mm)	Φ150X500
Cartridge	50g CO2
Weight (kg)	11
Temperature Range (°C)	0~+60
Packing Size (mm)	180x160x635



PSMCZ2/1

EN3 CE BSI CO2 2KG CO2

EN3 Approval Number	EN11786
Fire Rating	34B
Size of Cylinder (mm)	Φ104X480
Material	34CrMo4
Working Pressure (bar)	174
Weight (kg)	6.5
Temperature Range (°C)	-30~+60
Packing Size (mm)	180x112x590



PSMCZ2/2

EN3 CE CO2 2KG CO2

EN3 Approval Number	EN11798
Fire Rating	34B
Size of Cylinder (mm)	Φ111X454
Material	A6061
Working Pressure (bar)	174
Weight (kg)	6.2
Temperature Range (°C)	-30~+60
Packing Size (mm)	195x120x565



PSMPG9

EN3 CE 9KG POWDER ABC

EN3 Approval Number	SP20/13
Fire Rating	43A233BC
Size of Cylinder (mm)	Φ150X470
Cartridge	150g CO2
Weight (kg)	14.5
Temperature Range (°C)	-30~+60
Packing Size (mm)	210x190x565



PSMFG9/1 **HOT!**

EN3 CE BSI 9L FOAM

EN3 Approval Number	SP258/15
Fire Rating	43A233B40F
Size of Cylinder (mm)	Φ150X500
Cartridge	60g CO2
Weight (kg)	14.5
Temperature Range (°C)	0~+60
Packing Size (mm)	200x190x635



PSMCZ5 **HOT!**

EN3 CE BSI CO2 5KG CO2

EN3 Approval Number	SP03/08
Fire Rating	89B
Size of Cylinder (mm)	Φ136X593
Material	34CrMo4
Working Pressure (bar)	216
Weight (kg)	13.9
Temperature Range (°C)	-30~+60
Packing Size (mm)	190x145x700



PSMCZ5/1

EN3 CE BSI CO2 5KG CO2

EN3 Approval Number	EN11787
Fire Rating	89B
Size of Cylinder (mm)	Φ136X655
Material	34CrMo4
Working Pressure (bar)	174
Weight (kg)	13.5
Temperature Range (°C)	-30~+60
Packing Size (mm)	200x143x765



PSMCZ5/2


EN3 CE CO2 5KG CO2

EN3 Approval Number	EN11799
Fire Rating	89B
Size of Cylinder (mm)	Φ152X598
Material	A6061
Working Pressure (bar)	174
Weight (kg)	13
Temperature Range (°C)	-30~+60
Packing Size (mm)	200x160x720





NEW Ranges of Extinguishers

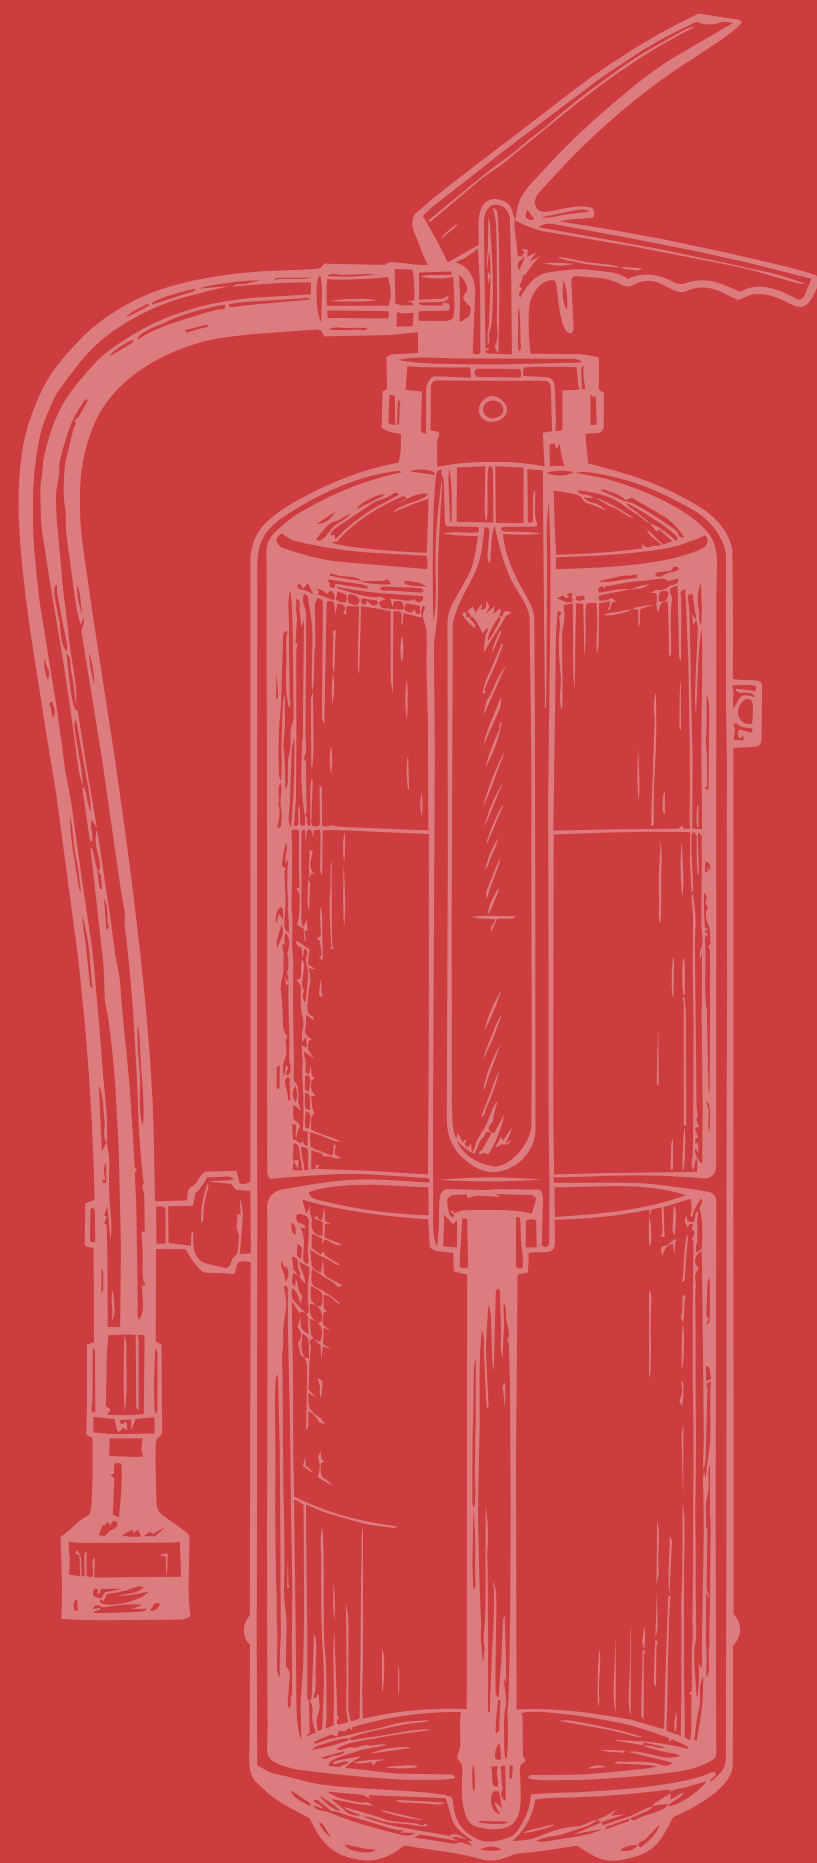


PSMFG9P

PSMFG6P

PSMPG9P

PSMPG6P



NEW



PSMFG6P



EN3 Approval Number	SP194/22
Fire Rating	34A 183B 40F
Cylinder size (mm)	150*490
Propellant	50g CO2 cartridge
Temperature	+5°C ~ +60°C
Packing size (mm)	160*170*600
Weight (kg)	10.2kg

PSMFG9P



EN3 Approval Number	SP195/22
Fire Rating	43A 233B 40F
Cylinder size (mm)	180*500
Propellant	50g CO2 cartridge
Temperature	+5°C ~ +60°C
Packing size (mm)	190*190*600
Weight (kg)	14.7kg



PSMFG6P/1



EN3 Approval Number	SP 46/24 / Coming soon
Fire Rating	13A 113B/27A 144B
Cylinder size (mm)	150*490
Propellant	50g CO2 cartridge
Temperature	+5°C ~ +60°C
Packing size (mm)	160*170*600
Weight (kg)	10.2kg



PSMFG9P/1



EN3 Approval Number	SP 47/24
Fire Rating	27A 183B 40F
Cylinder size (mm)	180*500
Propellant	50g CO2 cartridge
Temperature	+5°C ~ +60°C
Packing size (mm)	190*190*600
Weight (kg)	14.7kg

NEW



PSMPG6P



EN3 Approval Number	
Fire Rating	43A 233B C
Cylinder size (mm)	150*463
Propellant	120g CO2 cartridge
Temperature	-30°C ~ +60°C
Packing size (mm)	160*170*560
Weight (kg)	10kg



PSMPG9P



EN3 Approval Number	
Fire Rating	55A 233B C
Cylinder size (mm)	180*455
Propellant	150g CO2 cartridge
Temperature	-30°C ~ +60°C
Packing size (mm)	190*190*560
Weight (kg)	14kg



PSMFZ6P

EN3 CE 6L FOAM

EN3 Approval Number	SP196/22
Fire Rating	34A 183B 40F
Cylinder size (mm)	150*460
Design pressure (bar)	10
Temperature	+5°C ~ +60°C
Packing size (mm)	160*170*570
Weight (kg)	10.2kg

PSMFZ9P

EN3 CE 9L FOAM

EN3 Approval Number	SP197/22
Fire Rating	43A 233B 40F
Cylinder size (mm)	180*490
Design pressure (bar)	10
Temperature	+5°C ~ +60°C
Packing size (mm)	190*190*600
Weight (kg)	14.7kg



POWDER FOAM WATER CO₂



PSMPZ6P

CE 6KG POWDER ABC

EN3 Approval Number	
Fire Rating	43A 233B C
Cylinder size (mm)	150*460
Design pressure (bar)	15
Temperature	-30°C ~ +60°C
Packing size (mm)	160*170*570
Weight (kg)	10kg

PSMPZ9P

CE 9KG POWDER ABC

EN3 Approval Number	
Fire Rating	55A 233B C
Cylinder size (mm)	180*490
Design pressure (bar)	15
Temperature	-30°C ~ +60°C
Packing size (mm)	190*190*600
Weight (kg)	14.5kg



PSMFZ6L

EN3 CE 6L WATER

EN3 Approval Number	SP198/22
Fire Rating	13A Li
Cylinder Size (mm)	φ160*450
Weight (kg)	9.6
Extinguishing Medium	WATER ADDITIVE
Temperature	+5°C ~+60°C
Packing Size (mm)	210X160X565

PSMFZ9L

EN3 CE kiwa 9L WATER

EN3 Approval Number	SP199/22
Fire Rating	21A Li
Cylinder Size (mm)	φ180*500
Weight (kg)	13.7
Extinguishing Medium	WATER ADDITIVE
Temperature	+5°C ~+60°C
Packing Size (mm)	200X190X615



PSMFZ6/3

EN3 CE 6L FOAM

EN3 Approval Number	SP 245/22
Fire Rating	21A75F
Cylinder Size (mm)	φ160*450
Weight (kg)	9.8
Extinguishing Medium	WATER ADDITIVE
Temperature	+5°C ~+60°C
Packing Size (mm)	170X170X565

PSMFZ9/3

EN3 CE 9L FOAM

EN3 Approval Number	SP 246/22
Fire Rating	27A75F
Cylinder Size (mm)	φ180*500
Weight (kg)	13.8
Extinguishing Medium	WATER ADDITIVE
Temperature	+5°C ~+60°C
Packing Size (mm)	190X190X625

PSMFZ9/4

EN3 CE 9L WATER

EN3 Approval Number	SP 244/22
Fire Rating	55A
Cylinder Size (mm)	φ180*500
Weight (kg)	13.8
Extinguishing Medium	WATER ADDITIVE
Temperature	+5°C ~+60°C
Packing Size (mm)	190X190X620



PSMFZ6/4

EN3 CE 6L FOAM

EN3 Approval Number	SP 80/23
Fire Rating	34A
Cylinder Size (mm)	φ160*450
Weight (kg)	9.8
Extinguishing Medium	WATER ADDITIVE
Temperature	+5°C ~+60°C
Packing Size (mm)	170X170X565

PSMFZ6/5

EN3 CE 6L WATER

EN3 Approval Number	SP 44/24
Fire Rating	13A 113B
Cylinder Size (mm)	φ160*450
Weight (kg)	9.8
Extinguishing Medium	WATER ADDITIVE
Temperature	+5°C ~+60°C
Packing Size (mm)	170X170X565

PSMFZ9/5

EN3 CE 9L FOAM

EN3 Approval Number	SP 45/24
Fire Rating	27A 183B 40F
Cylinder Size (mm)	φ180*500
Weight (kg)	13.8
Extinguishing Medium	WATER ADDITIVE
Temperature	+5°C ~+60°C
Packing Size (mm)	190X190X620



PSMCZ2/1

				2KG CO2
NF Approval Number	EC2 761 898A0			
Fire Rating	34B			
Size of Cylinder (mm)	Φ104X480			
Material	34CrMo4			
Working Pressure (bar)	174			
Weight (kg)	6.5			
Temperature Range (°C)	-30~+60			
Packing Size (mm)	180x112x590			



PSMCZ5/1

				5KG CO2
NF Approval Number	EC5 762 899A0			
Fire Rating	89B			
Size of Cylinder (mm)	Φ136X655			
Material	34CrMo4			
Working Pressure (bar)	174			
Weight (kg)	13.5			
Temperature Range (°C)	-30~+60			
Packing Size (mm)	200x143x765			



PSMPZ1F

				1KG POWDER ABC
NF Approval Number	EP1 760 731A0			
Fire Rating	5A34BC			
Size of Cylinder (mm)	Φ85*270			
Working Pressure (bar)	15			
Weight (kg)	2.3			
Temperature Range (°C)	-30~+60			
Packing Size (mm)	100x100x360			



PSMPZ2F

				2KG POWDER ABC
NF Approval Number	EP2 760 732A0			
Fire Rating	13A89BC			
Size of Cylinder (mm)	Φ110X302			
Working Pressure (bar)	15			
Weight (kg)	3.6			
Temperature Range (°C)	-30~+60			
Packing Size (mm)	120x120x390			



PSMPZ6F

				6KG POWDER ABC
NF Approval Number	EP6 760 733A0			
Fire Rating	34A183BC			
Size of Cylinder (mm)	Φ160X450			
Working Pressure (bar)	15			
Weight (kg)	9.5			
Temperature Range (°C)	-30~+60			
Packing Size (mm)	175x175x565			



PSMFZ6F

					6L FOAM
NF Approval Number	EA6 760 735A0				
Fire Rating	21A144B				
Size of Cylinder (mm)	Φ160X450				
Working Pressure (bar)	10				
Weight (kg)	9.5				
Temperature Range (°C)	+5~+60				
Packing Size (mm)	175x175x565				



PSMFZ6F/1

		6L FOAM
NF Approval Number	-----	
Fire Rating	13A 113B	
Size of Cylinder (mm)	Φ160X450	
Working Pressure (bar)	10	
Weight (kg)	9.5	
Temperature Range (°C)	+5~+60	
Packing Size (mm)	175x175x565	



PSMPZ9F

				9KG POWDER ABC
NF Approval Number	EP9 760 734A0			
Fire Rating	43A233BC			
Size of Cylinder (mm)	Φ180X485			
Working Pressure (bar)	15			
Weight (kg)	13.5			
Temperature Range (°C)	-30~+60			
Packing Size (mm)	190x190x595			



PSMFZ9F

					9L FOAM
NF Approval Number	EA9 760 736A0				
Fire Rating	21A183B				
Size of Cylinder (mm)	Φ180X500				
Working Pressure (bar)	10				
Weight (kg)	14.1				
Temperature Range (°C)	+5~+60				
Packing Size (mm)	190x190x605				



PSMFZ9F/1

		9L FOAM
NF Approval Number	-----	
Fire Rating	21A 183B	
Size of Cylinder (mm)	Φ180X500	
Working Pressure (bar)	10	
Weight (kg)	14.1	
Temperature Range (°C)	+5~+60	
Packing Size (mm)	190x190x605	



PSMFG6S

CE **6L FOAM**

NF Approval No.	13A 113B
Fire Rating	13A 113B
Cylinder Size (mm)	150*480
Propellant	50g CO2 cartridge
Temperature	+5°C ~ +60°C
Packing Size (mm)	160*170*600
Weight (kg)	9.7kg



PSMFG9S

CE **9L FOAM**

NF Approval No.	21A 183B
Fire Rating	21A 183B
Cylinder Size (mm)	180*485
Propellant	50g CO2 cartridge
Temperature	+5°C ~ +60°C
Packing Size (mm)	190*190*600
Weight (kg)	13.6kg




model No.	PS025MP	PS05MP	PS10MP	PS20MP
Description	2.5 / 5 / 10 / 20 lb.ABC Multipurpose Dry Chemical Fire Extinguisher			
Agent Capacity (lb/kg)	2.5 lb. (1.13kg)	5 lb. (2.27kg)	10 lb. (4.54kg)	20 lb. (9.07kg)
Design Standard	ANSI/UL 299&711	ANSI/UL 299&711	ANSI/UL 299&711	ANSI/UL 299&711
Fire Rating	1A:10BC	3A:30BC	4A:60BC	10A:80BC
Temperature Range	-65° to 120°F (-54° to 49°C)			
Operating Pressure (psi/bar)	195 (13.45)	195 (13.45)	195 (13.45)	195 (13.45)
Bracket	PS025BK/PS025VB	PS05BK	PS10BK	PS20BK
Extinguisher Weight (lb/kg) estimate	5.5lb. (2.5kg)	10lb. (4.5kg)	17.5lb. (7.9kg)	33.3lb. (15.1kg)
Packing Size (L x Wx H)	120x120x405	150x145x430	165x155x545	195x195x595

NEW



model No.	PS06MC	PS2.5GL
Description	6 L Wet Chemical Fire Extinguisher	2.5 Gal Wet Chemical Fire Extinguisher
Agent Capacity	6 Liter	2.5 Gal
Design Standard	ANSI/UL 8&711	ANSI/UL 8&711
Fire Rating	2-A : K	3-A : K
Temperature Range	40° to 120°F (4.4° to 49°C)	
Operating Pressure (psi/bar)	100 (6.9)	100 (6.9)
Bracket	PS06BK/PS20BK	PS06BK/PS20BK
Extinguisher Weight (lb/kg) estimate	24.5lb. (11.1kg)	36.4lb. (16.5kg)
Shipping Size (L x Wx H)	195x195x505	195x195x640

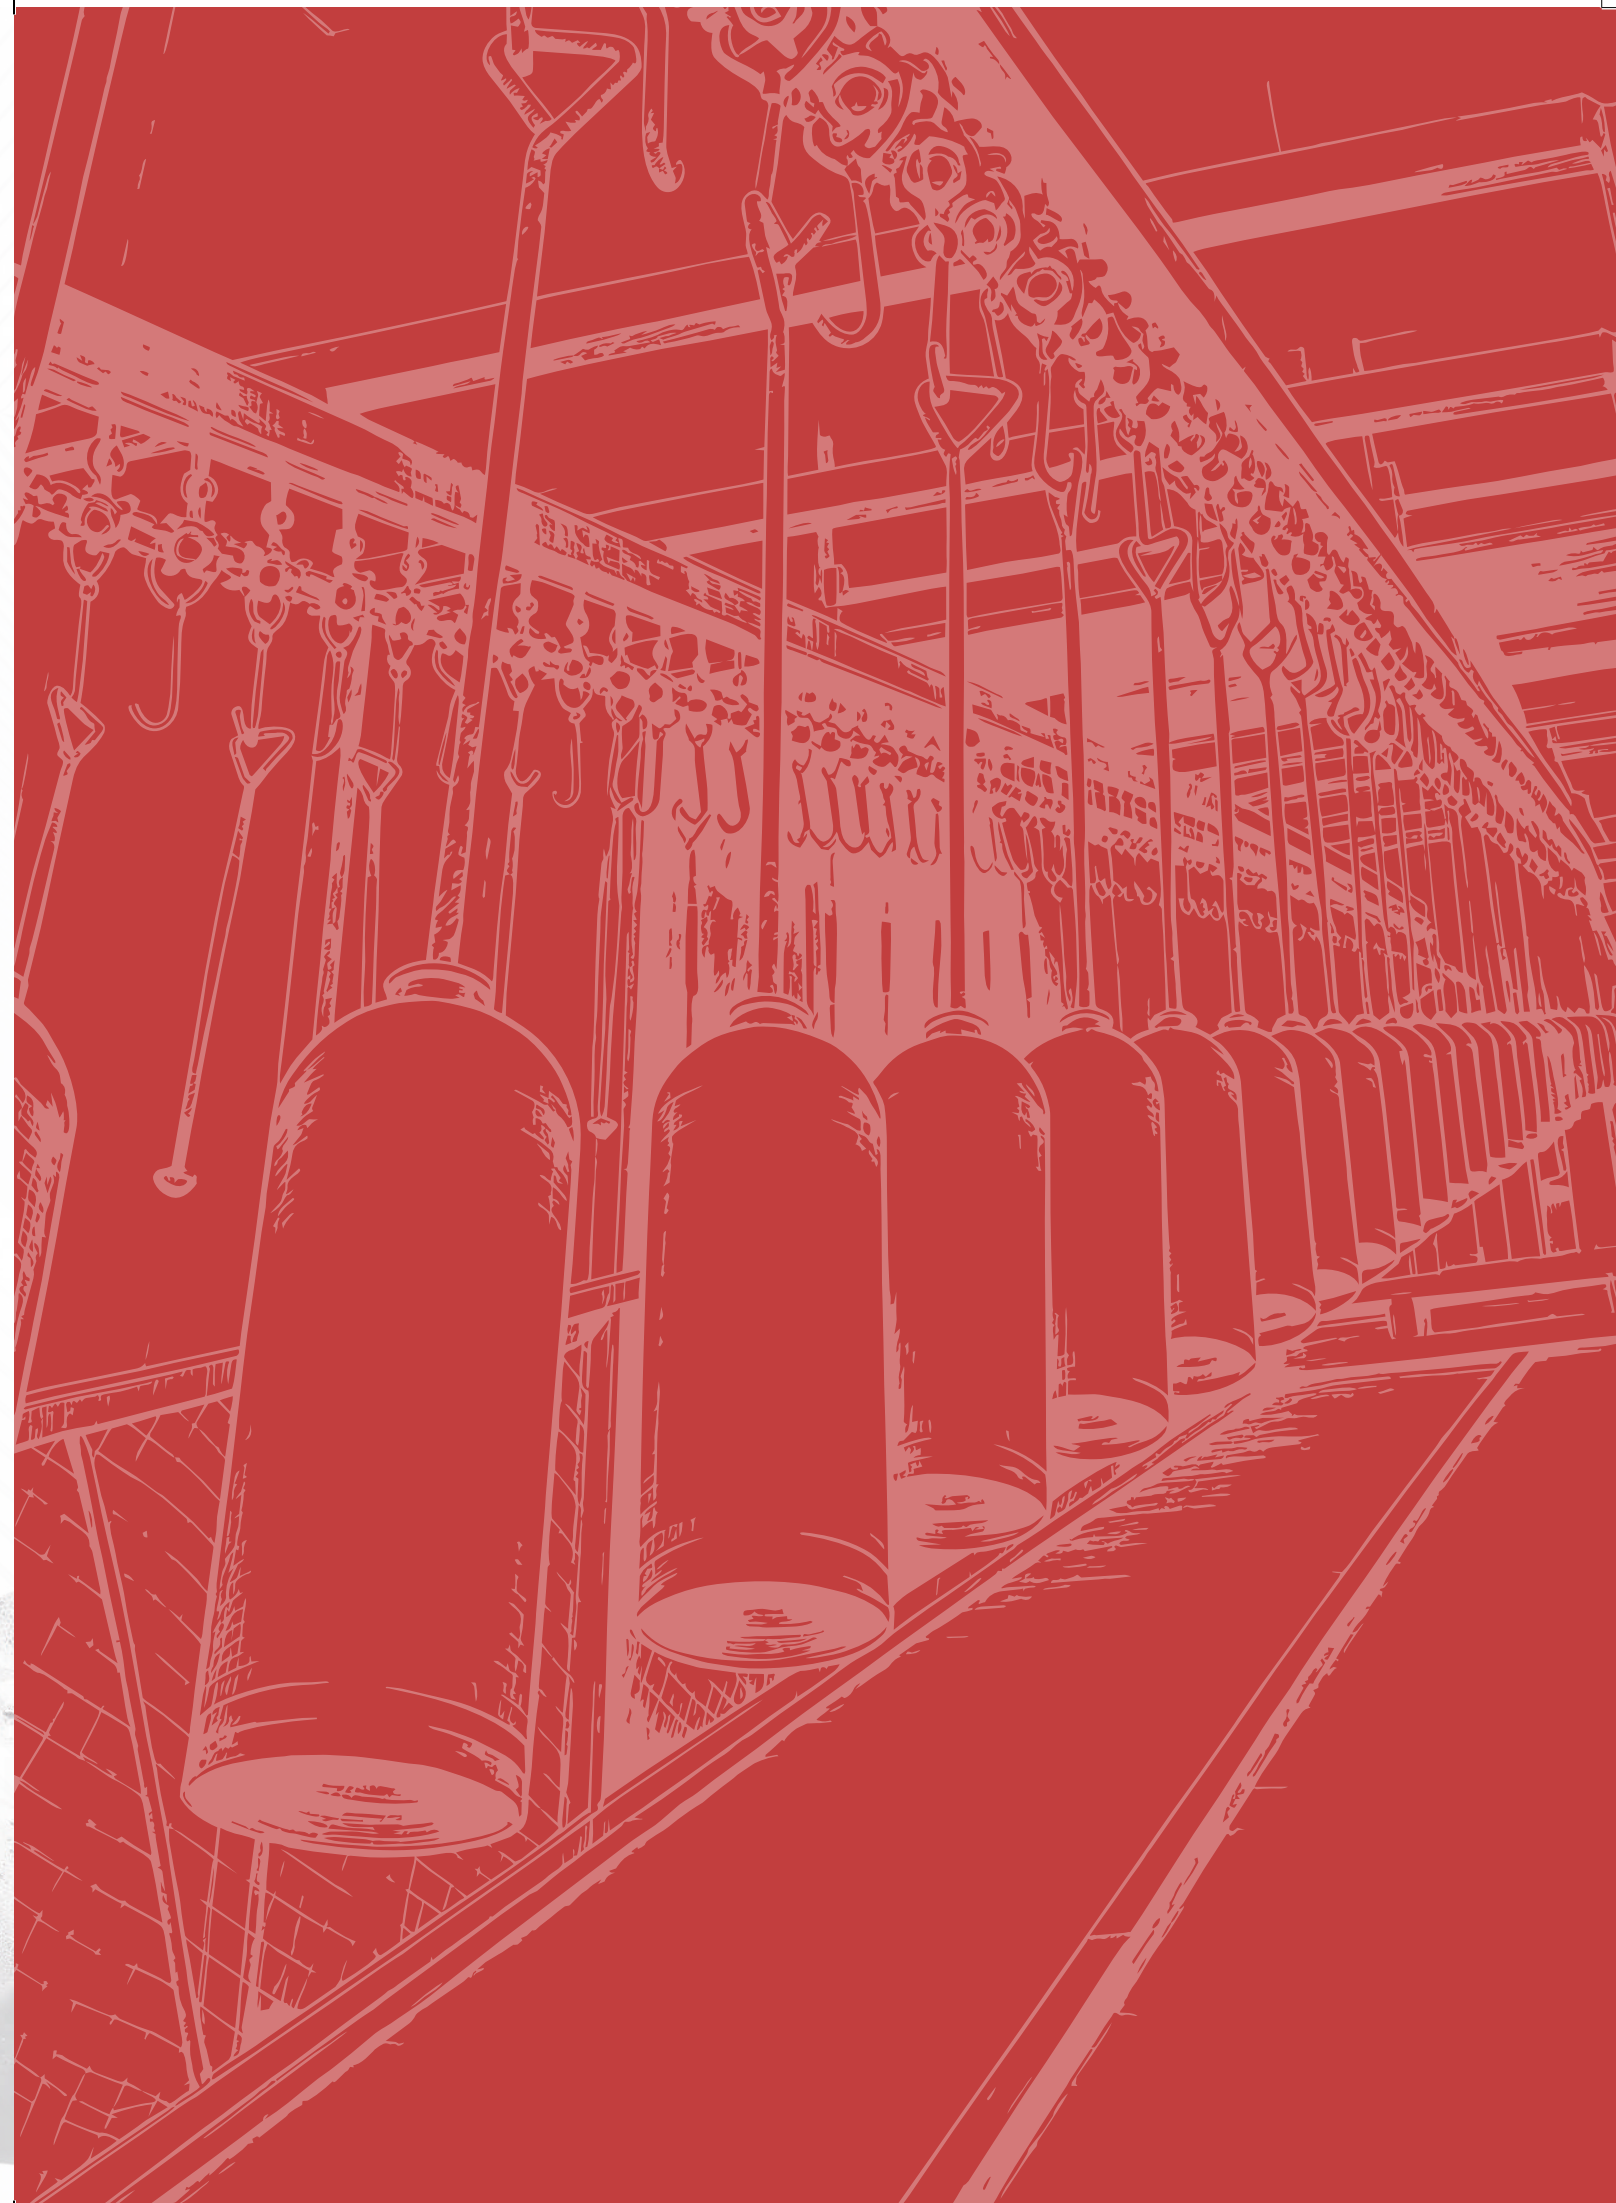



SA01-506-01 CE

External Diameter (mm)	Φ280
Height (mm)	310
Extinguishing Medium	40% ABC powder
Working Pressure (Bar)	14
Packing Size (mm)	300X300X340



SA01-512-01 CE

External Diameter (mm)	Φ230
Height (mm)	350
Extinguishing Medium	40% ABC powder
Working Pressure (Bar)	14
Packing Size (mm)	250X250X530



SA01-150-01 CE

External Diameter (mm)	Φ300
Height (mm)	920
Extinguishing Medium	40% ABC powder
Working Pressure (Bar)	17
Packing Size (mm)	500X440X1100



SA01-445-01 CE

External Diameter (mm)	Φ300
Height (mm)	920
Extinguishing Medium	3% AFFF
Working Pressure (Bar)	17
Packing Size (mm)	500X440X1100



SA01-125-01 CE

External Diameter (mm)	Φ250
Height (mm)	660
Extinguishing Medium	3% AFFF
Working Pressure (Bar)	17
Packing Size (mm)	500X440X1100



SA01-210-02

External Diameter (mm)	Φ152
Height (mm)	570
Extinguishing Medium	CO2
Working Pressure (Bar)	174
Packing Size (mm)	300X460X850

POWDER EXTINGUISHERS FOR HOME AND VEHICLES



PSMPZ2K

PSMPZ1K

PSMPZ1L

POWDER FOAM WATER CO₂



PSMPZ1K

1KG POWDER ABC

Size of Cylinder (mm)	Φ90*214
Weight (kg)	1.97
Temperature range (°C)	-30~+60
Fire Rating	5A34BC
Packing size (mm)	290×200×285(6pcs)



PSMPZ2K

2KG POWDER ABC

Size of Cylinder (mm)	Φ112*309
Weight (kg)	3.67
Temperature range (°C)	-30~+60
Fire Rating	8A55BC
Packing size (mm)	355×245×380



PSMPZ1L

CE 1KG POWDER ABC


Size of Cylinder (mm)	Φ86*230
Weight (kg)	1.80
Temperature range (°C)	-30~+60
Fire Rating	5A34BC
Packing size (mm)	275×190×315(6pcs)



PSMPZ2L

CE 2KG POWDER ABC

Size of Cylinder (mm)	Φ105*298
Weight (kg)	3.30
Temperature range (°C)	-30~+60
Fire Rating	8A55BC
Packing size (mm)	330×225×380

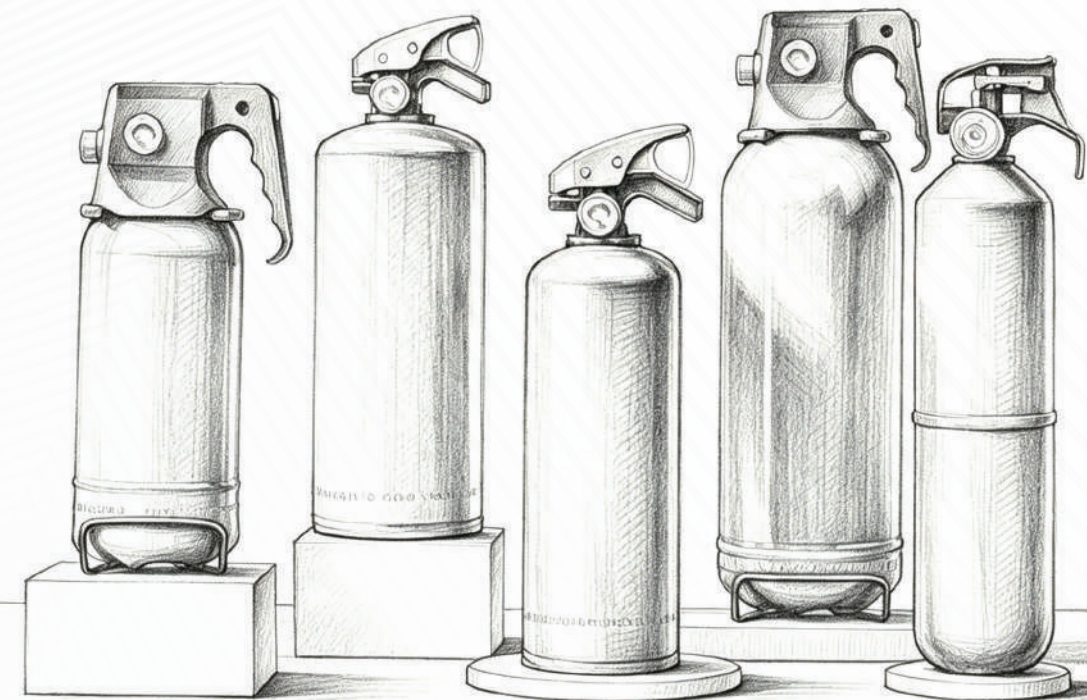



PSMPZ1D

	1KG POWDER ABC
Size of Cylinder (mm)	Φ85X270
Weight (kg)	2.2
Temperature Range (°C)	-30~+60
Fire Rating	5A34BC
Packing Size (mm)	100x100x370

PSMPZ2D

	2KG POWDER ABC
Size of Cylinder (mm)	Φ110X333
Weight (kg)	3.5
Temperature Range (°C)	-30~+60
Material	13A70BC
Packing Size (mm)	120x120x405

STAINLESS STEEL TROLLEY EXTINGUISHER

	SA01-930-01	SA01-950-01
Spec.	30L	50L
Volume (L)	40	67
Outdiameter (mm)	300	325
Height (mm)	666	920
Wall Thickness (mm)	2"BSP	M74*2



STAINLESS STEEL FIRE EXTINGUISHER

	SA01-930-11	SA01-904-11	SA01-906-11
Spec.	3L	4L	6L
Volume (L)	4.84	5.95	8.6
Outdiameter (mm)	130	130	180
Height (mm)	418	450	406
Wall Thickness (mm)	1.1	1.1	1.1
Cylinder Weight (kg)	1.81	1.89	2.46
Agent Type	Dry Powder Water / Foam	Dry Powder Water / Foam	Dry Powder Water / Foam

	SA01-909-11	SA01-909-12
Spec.	9L	9L
Volume (L)	12.05	11.4
Outdiameter (mm)	180	179
Height (mm)	545	520
Wall Thickness (mm)	1.1	1.4
Cylinder Weight (kg)	3.15	3.5
Agent Type	Dry Powder Water / Foam	Dry Powder Water / Foam





Capacity	3LB	7LB	11LB	14LB
Design Standard	DOT-4BA / EN3-8 ANSI/CAN/UL/ULC 2166	DOT-4BA / EN3-8 ANSI/CAN/UL/ULC 2166	DOT-4BW / EN3-8 ANSI/CAN/UL/ULC 2166	DOT-4BW / EN3-8 ANSI/CAN/UL/ULC 2166
Item No.	PSDOT 003A	PSDOT 007A	PSDOT 011A	PSDOT 014A
Water Capacity (L)	1.23L (75cu in)	2.87L (174cu in)	4.65L (284cu in)	5.74L (350cu in)
Cylinder Size (mm)	Φ85*271	Φ130*288	Φ150*340	Φ150*405
Material	DC01	DC01	HP295	HP295
Min Thickness (mm)	1.27	1.88	2.2	2.2
Cylinder Weight (kg)	1.05	2.27	3.79	4.38



Capacity	45LB	60LB	75LB	100LB
Design Standard	DOT-4BW / EN3-8	DOT-4BW / EN3-8	DOT-4BW / EN3-8	DOT-4BW / EN3-8
Item No.	PSDOT 0045A	PSDOT 0060A	PSDOT 075A	PSDOT 0100A
Water Capacity (L)	20.10L (1227 cu in)	27.75L (1693 cu in)	33.98L (2074 cu in)	45.02L (2748 cu in)
Cylinder Size (mm)	Φ254*492	Φ254*650	Φ254*770	Φ254*1005
Material	Q345R	Q345R	Q345R	Q345R
Min Thickness (mm)	2.5	2.5	2.5	2.5
Cylinder Weight (kg)	10.43kg	13.20kg	15.24kg	18.78kg



CE Approved Stainless Steel Cylinder For Extinguishers

STAINLESS STEEL CYLINDER CE

	SA03 -601-01	SA03 -602-01	SA03 -603-01
Type	1KG	2KG	3KG/3L
Water Capacity (L)	1.1	2.5	3.94
Outdiameter (mm)	89	110	130
Height (mm)	250	302	346
Material	SUS304-2B	SUS304-2B	SUS304-2B
Min.wall Thickness (mm)	0.64	0.64	0.64
Cylinder weight (mm)	0.55	0.83	1.23
Remark	rolling-sheet, 5feet	rolling-sheet, 5feet	rolling-sheet, 5feet
Packing Size (pcs)	570*380*270 / 24pcs	465*465*320/16pcs	550*415*365/12pcs

	SA03 -606-01	SA03 -606-02	SA03 -609-01
Type	6KG/6L	7KG/6L	10KG/9L
Water Capacity (L)	8.06	8.89	12.5
Outdiameter (mm)	160	180	180
Height (mm)	448	400	545
Material	SUS304-2B	SUS304-2B	SUS304-2B
Min.wall Thickness (mm)	0.64	0.64	0.64
Cylinder weight (mm)	1.96	2.2	2.56
Remark	rolling-sheet, 5feet	rolling-sheet, 5feet	rolling-sheet, 5feet
Packing Size (pcs)	505*304*470/6pcs	565*380*420/6pcs	380*380*565/6pcs



CE Approved Carbon Steel Cylinder For Extinguishers


CUSTOMERIZED CYLINDER CE

	SA03 -306-08	SA03 -106-08	SA03 -309-08
Type	6KG	6KG	9KG
Water capacity (L)	7.1	7.1	10
Outdiameter (mm)	150	150	180
Height (mm)	461	443	459
Material	DC01(ST12)	DC01(ST12)	DC01(ST12)
Min.wall thickness (mm)	1.2	1.2	1.2
Packing size	475*325*480/6ocs	475*325*463/6pcs	570*380*480/6pcs

	SA03 -109-08	SA03 -312-08	SA03 -112-08
Type	9KG	12KG	12KG
Water capacity (L)	10	13	13
Outdiameter (mm)	180	180	180
Height (mm)	442	586	569
Material	DC01(ST12)	DC01(ST12)	DC01(ST12)
Min.wall thickness (mm)	1.2	1.2	1.2
Packing size	570*380*460/6pcs	570*380*606/6pcs	570*380*600/6pcs

CE Approved cylinders for CO2 extinguishers CE

	SA03 -202-01	SA03 -205-01	SA03 -202-02
Type	2kg	5kg	2kg
Filling ratio	0.667 / 0.75	0.667 / 0.75	0.667 / 0.75
Outdiameter (mm)	150 / 150	138 / 138	111 / 111
Height (mm)	475 / 440	655 / 600	475 / 430
Water capacity (L)	3 / 2.67	7.5 / 6.67	3 / 2.67
Weight (kg)	4.2 / 3.8	8.3 / 7.8	3.4 / 2.9
Test pressure (bar)	250 / 315	250 / 315	250 / 315
Material	34CrMo4	34CrMo4	AA6061
Packing size (mm)	125*125*490 115*115*445	150*150*680 150*150*620	125*125*500 125*125*450

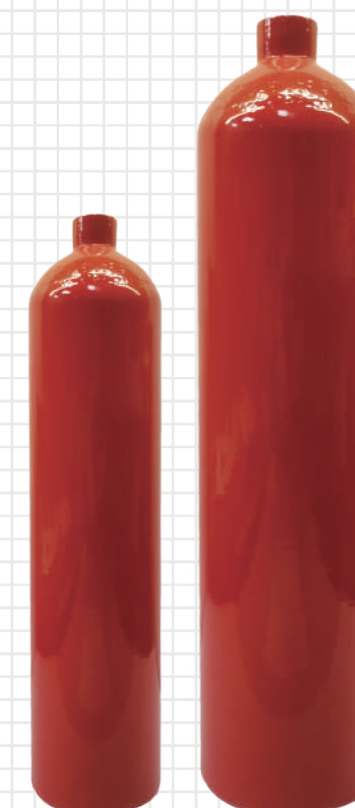

	SA03 -205-02	SA03 -202-03	SA03 -205-03
Type	5kg	2kg	5kg
Filling ratio	0.667 / 0.75	0.667	0.667
Outdiameter (mm)	159 / 159	114	152
Height (mm)	600 / 535	415	570
Water capacity (L)	7.5 / 6.67	3	7.5
Weight (kg)	8.3 / 7.8	5.5	13
Test pressure (bar)	250 / 315	250	250
Material	AA6061	Ck45	Ck45
Packing size (mm)	175*175*620 175*175*555	125*125*440	170*170*590



CE Approved Carbon Steel Cylinder For Extinguishers

CE STEEL CYLINDERS



	SA03 -101-01	SA03 -101-02	SA03 -102-01	SA03 -102-02	SA03 -103-01
Type	1KG	1KG	2KG	2KG	3KG
Water Capacity (L)	1.32	1.29	2.53	2.4	3.9
Outdiameter (mm)	85	85	110	110	130
Height (mm)	280	270	327	327	346
Material	DC01(ST12)	DC01(ST12)	DC01(ST12)	DC01(ST12)	DC01(ST12)
Min.wall Thickness (mm)	0.79	0.79	1.07	1.07	1.14
Cylinder weight (mm)	0.7	0.66	1.3	1.17	1.69
Remark	with foot ring	3feet	with foot ring	5feet	5feet
Packing Size (pcs)	540*375*300/24pcs	540*375*290/24pcs	465*465*350/16pcs	465*465*320/16pcs	550*415*365/12pcs

	SA03 -106-01	SA03 -109-01	SA03 -403-01	SA03 -406-01	SA03 -409-01
Type	6KG	9KG	3L	6L	9L
Water Capacity (L)	7.8	10.5	3.57	8	11.33
Outdiameter (mm)	160	180	130	160	180
Height (mm)	450	485	335	470	525
Material	DC01(ST12)	DC01(ST12)	DC01(ST12)	DC01(ST12)	DC01(ST12)
Min.wall Thickness (mm)	1.24	1.3	1.14	1.24	1.3
Cylinder weight (mm)	2.95	3.6	1.69	2.95	3.6
Remark	5feet	5feet	5feet	5feet	5feet
Packing Size (pcs)	505*340*470/6pcs	565*380*505/6pcs	140*140*345	170*170*480	190*190*535




TPED APPROVED CARTRIDGE

	SA03 -355-01	SA03 -360-01	SA03 -375-01
Water Capacity (L)	0.074	0.08	0.7
Outdiameter (mm)	28	28	28
Height (mm)	208	324	267
Connection Thread	M12*1.25	M12*1.25	M12*1.25
Filled CO2 weight (g)	55	60	75
Test pressure (bar)	250	250	250
Packing size (mm)	240*320*180mm/50pcs	300*320*180mm/50pcs	310*350*180mm/50pcs

	SA03 -312-01	SA03 -315-01	SA03 -325-01
Water Capacity (L)	0.16	0.2	0.28
Outdiameter (mm)	35	35	40
Height (mm)	255	305	375
Connection Thread	M12*1.25	M12*1.25	M12*1.25
Filled CO2 weight (g)	120	150	210
Test pressure (bar)	250	250	250
Packing size (mm)	240*400*220mm/40pcs	280*450*180mm/40pcs	400*400*150mm/30pcs



Hose REELS





DN33*30m Hose Reel




PSHR3330SF


Hose	33mmX30m (EN694, PVC)
Minimum Flow Rate	128L /min (at 4 bar)
Working / Test Pressure	7bar /10.5bar
Drum finishing	Red (RAL3000) Epoxy Polyester Electrostatic Powder Coating
Design & Manufacture to	BS EN671-1 , NF EN671-1



Manual Fixed Type



Item No.	SA10 -304D-14F	SA10 -314D-14F
Disc Diameter (mm)	460	550
Hose	19mm*30m (EN694, PVC)	25mm*30m (EN694, PVC)
Minimum Flow Rate(at 4 bar)	34L/min	44L/min
Working/Test pressure	12bar / 18bar	
Drum Finishing	Red (RAL3000) epoxy polyester electrostatic powder coating	
Design & Manufacture to	BS EN671-1:2012	

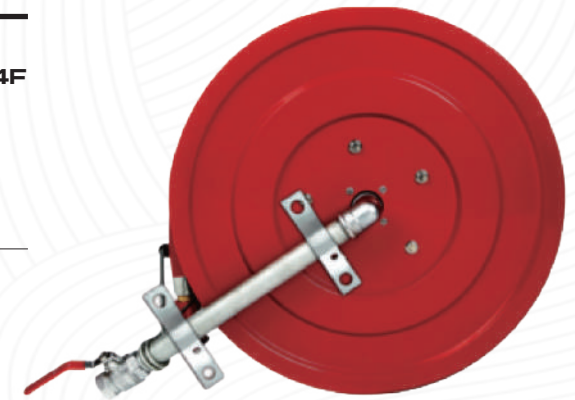

Manual Swing Type




Item No.	SA10 -304D-02S	SA10 -314D-02S
Disc Diameter (mm)	460	550
Hose	19mm*30m (EN694, PVC)	25mm*30m (EN694, PVC)
Minimum Flow Rate (at 4 bar)	34L/min	44L/min
Working/Test pressure	12bar / 18bar	
Drum Finishing	Red (RAL3000) epoxy polyester electrostatic powder coating	
Design & Manufacture to	BS EN671-1:2012	



Automatic Swing Type



Item No.	SA10 -304D-03S	SA10 -314D-03S
Disc Diameter (mm)	460	550
Hose	19mm*30m (EN694, PVC)	25mm*30m (EN694, PVC)
Minimum Flow Rate (at 4 bar)	34L/min	44L/min
Working/Test pressure	12bar / 18bar	
Drum Finishing	Red (RAL3000) epoxy polyester electrostatic powder coating	
Design & Manufacture to	BS EN671-1:2012	

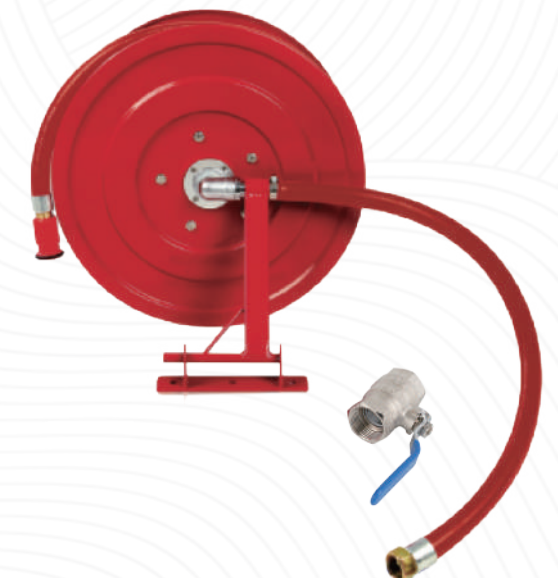



NF DN25*30m Hose Reels

PSHR2530SFA



Hose	25mm*30m (EN694, PVC)
Minimum Flow Rate	39L/min (at 2 bar)
Working/Test pressure	12bar / 18bar
Drum Finishing	Red (RAL3000) epoxy polyester electrostatic powder coating
Design & Manufacture to	NF EN671-1:2012

NF DN33*30m Hose Reels

PSHR3330SF



Hose	33mm*30m (EN694, PVC)
Minimum Flow Rate	128L/min (at 4 bar)
Working/Test pressure	7bar / 10.5bar
Drum Finishing	Red (RAL3000) epoxy polyester electrostatic powder coating
Design & Manufacture to	NF EN671-1:2012



SA10-600-01

Hose Size	25mm	33mm
Hose Length (m)	20,30	20,30
Disc Diameter (mm)	550	550


SA10-410-06

Hose Size	19mm	25mm
Hose Length (m)	25,30	25,30
Disc Diameter (mm)	500	500



SA10-666-33

1"x40M	1-1/4"x40M	1-1/2"x40M
--------	------------	------------

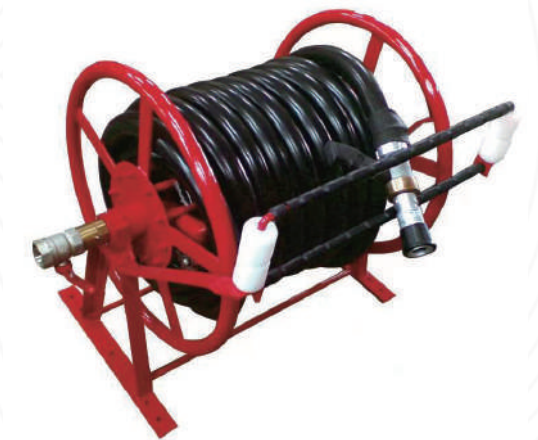

SA10-666-33A

1"x40M	1-1/4"x40M	1-1/2"x40M
--------	------------	------------



○ SA10-600-02/02A

Item No.	SA10-600-02	SA10-600-02A
Hose Specification	DN25	DN33
Hose Length (m)	20,25,30 PU hose	20,25,30 PU hose
Cabinet Size (mm)	635*635*245	700*700*245



○ SA10-600-03

Item No.	SA10-600-03
Hose Specification	DN45
Hose Length (m)	20m fire hose
Cabinet Size (mm)	615*465*155



○ SA10-300-06

Item No.	SA10-300-06
Cabinet Size (mm)	615*465*155



○ SA10-300-05

Item No.	SA10-300-05
Cabinet Size (mm)	485*505*155



○ SA10-600-01

Item No.	SA10-600-01
Cabinet Size (mm)	1450*720*280



○ SA10-300-07

Item No.	SA10-300-07
Cabinet Size (mm)	1000*700*270



○ SA10-410-01/01A

Item No.	SA10-410-01	SA10-410-01A
Cabinet Size (mm)	800*800*300	650*650*250
Note	25*30m, PVC hose	20,25,30 PU hose



○ SA10-300-10/SA10-406-01

Item No.	SA10-300-10	SA10-406-01
Cabinet Size (mm)	280*203*560	280*263*710
Note	3.5~4.5kg powder extinguisher	2.5kg CO2 / 9kg powder extinguisher



○ SA10-418-070S/070C

Item No.	SA10-410-070S	SA10-410-070C
Cabinet Size (mm)	340*440*140	300*400*140
Note	Exposed	Embedded



○ SA10-417-050

Item No.	SA10-417-050
Cabinet Size (mm)	300*300*125




○ SA10-420-020

Item No.	SA10-420-020
Cabinet Size (mm)	600*480*440



○ SA13-400-08

Item No.	SA13-400-08
Cabinet Size (mm)	120*160*50



Website:
www.saintsea.com

Global Sales Center

No.1-305, United Plaza, No.58, Qianjiang Road,
Hangzhou, Zhejiang, China.
PC : 310008

T : 0086 - (0)571 - 85772095
F : 0086 - (0)571 - 85772196

E : sales@saintsea.com
saintseagroup@gmail.com

Version 2026

Manufacturing Center

Tianhua Industrial District, Langxia Street Scene,
Yuyao City, Zhejiang Province, China.
PC : 315480

